

DFB Interband Cascade Lasers (ICL) 4600 nm - 5300 nm



WAVELENGTH

- 760–830 nm
- 830–920 nm
- 920–1100 nm
- 1100–1300 nm
- 1300–1650 nm
- 1650–1850 nm
- 1850–2200 nm
- 2200–2600 nm
- 2600–2900 nm
- 2800–4000 nm
- 4000–4600 nm
- 4600–5300 nm**
- 5300–5800 nm
- 5800–6500 nm
- 6000–14000 nm

nanoplus Distributed Feedback Lasers (**DFB**) are specifically designed for high-precision gas detection using tunable diode laser absorption spectroscopy (**TDLAS**). Our devices operate **reliably** in more than 50,000 installations worldwide. For 25 years nanoplus has set the standard for DFB laser technology and is the only manufacturer routinely providing DFB lasers at **any wavelength**.

Key features:

- MONOMODE
- CONTINUOUS WAVE
- ROOM TEMPERATURE
- MODE HOP FREE TUNING

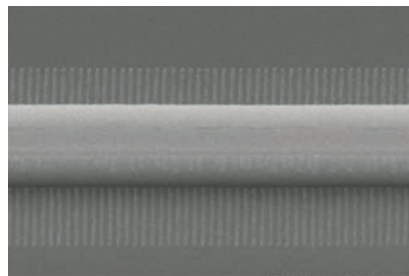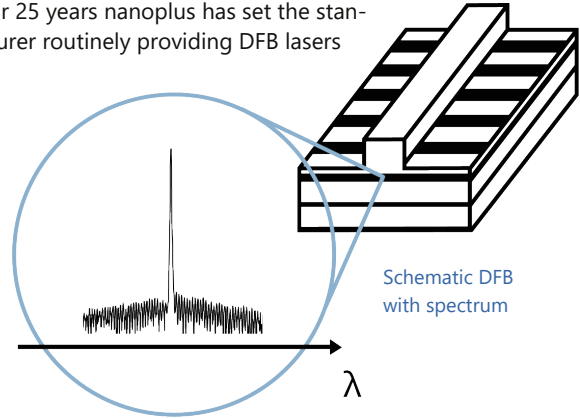

Overgrowth-free DFB device processing

Any **custom wavelength** is possible: You tell us what you need and we deliver it. With our patented DFB technology we design any wavelength **between 760 nm and 14 μm**.

Our excellent **spectral purity** is characterized by a large side mode suppression ratio (**SMSR**) of **> 35 dB**, giving your system a low signal to noise ratio against crossinterference.

A **narrow linewidth below 3 MHz** guarantees ultra-precise scanning of the absorption line feature. The **high output power** of **several mW** yields a stronger signal and increases your measurement precision.

Fast and wide wavelength tuning is required for in situ systems. Most customers use a scan rate of 10 kHz and benefit from our very **large tuning coefficient**.


“Do not change your ideas, let us deliver a laser that fits your application.”

We offer **various packaging options**, e.g. several free space housings including TEC and NTC, fiber coupling, **collimation** and **custom designs**. What do you require?


If you require **custom specifications**, please contact us. Nearly 80 % of our devices are more or less customer-specific. As nanoplus is a **fully vertically integrated company**, we control the entire process chain from design to packaging. Both nanoplus production facilities are based in **Germany**. To guarantee consistent product quality we apply a strict and **ISO certified quality management system** at all levels.

Our sales and R&D teams have long-standing experience in developing lasers. They will advise you in your design and realization phase as well as after-sales:

We make market leaders!

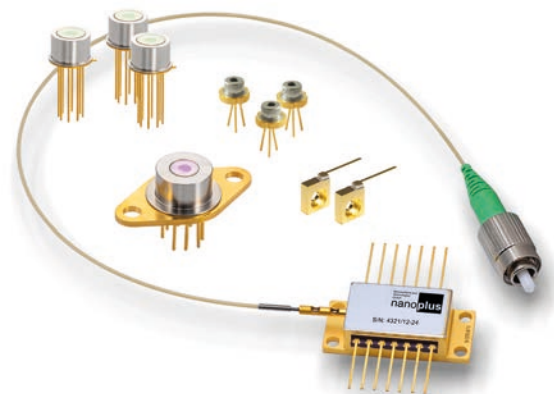


nanoplus DFB lasers on TO66, TO5, TO5.6, c-mount and SM-BTF




Typical Specifications: 4600 nm - 5300 nm

This data sheet reports performance data of a **sample DFB ICL at 5263 nm**, which is representative for the entire wavelength range. We offer enhanced specifications for 5184nm and 5263 nm. Please refer to our [TOP Wavelengths](#) for further details: <https://nanoplus-usa.com/products/dfb-laser>.

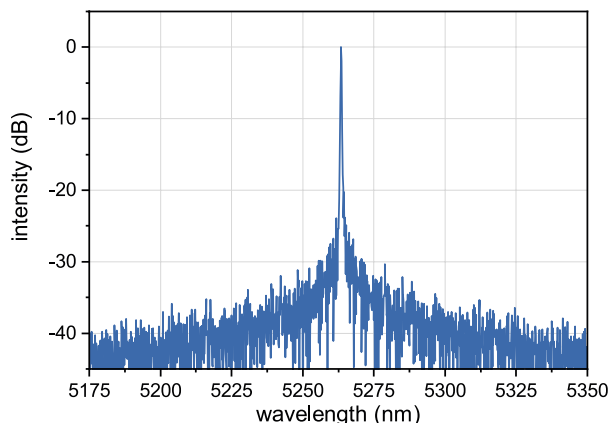

Typical room temperature cw spectrum of a nanoplus DFB laser at 5263 nm

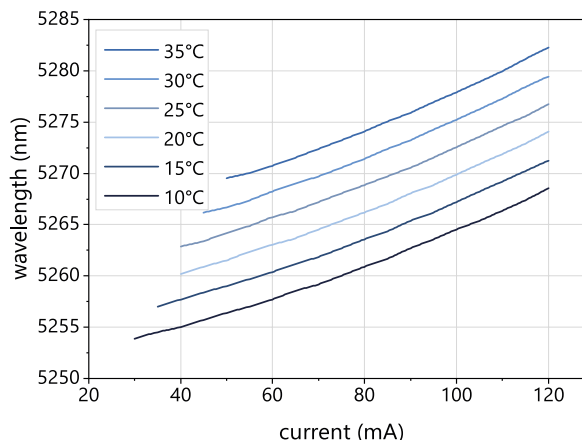

Typical mode hop free tuning of a nanoplus DFB laser at 5263 nm by current and temperature

| electro-optical characteristics | symbol | unit | min. | typ | max. |
|--|----------------|---------|------|---------------------------|------|
| operating wavelength (at T_{op} , I_{op}) | λ_{op} | nm | | Please specify to 0.1 nm. | |
| optical output power (at λ_{op}) | P_{op} | mW | | 3 | |
| operating current | I_{op} | mA | | | 120 |
| operating voltage | V_{op} | V | | 5 | |
| threshold current | I_{th} | mA | 30 | 40 | 70 |
| side mode suppression ratio | SMSR | dB | | > 35 | |
| current tuning coefficient | C_I | nm / mA | | 0.14 | |
| temperature tuning coefficient | C_T | nm / K | | 0.48 | |
| operating chip temperature | T_{op} | °C | +10 | +20 | +50 |
| operating case temperature* | T_c | °C | -20 | +25 | +50 |
| storage temperature* | T_s | °C | -30 | +20 | +70 |

* non-condensing

laser packaging options

TO66 with TEC and NTC, sealed, AR coated window

Other packaging options may be discussed on request.

Technical drawings & accessories are available at: <https://www.nanoplus-usa.com/products/packaging>

Please contact victor.perez@nanoplus.com for customized specifications, quotes and further questions. Visit the [nanoplus website](#) for technical notes, application samples or literature referrals.

nanoplus America Inc., nanoplus-usa.com, phone: +1-720-453-2454, email: victor.perez@nanoplus.com
©copyright nanoplus America Inc. 2024, all rights reserved. Technical data is subject to change without notice.