


# TOP Wavelengths

## DFB: 1512.2 nm

### TOP WAVELENGTH


760.8 nm
1278.8 nm
1392.0 nm
<b>1512.2 nm</b>
1560 - 1590 nm
1651 & 1654 nm
1742.0 nm
1854 & 1877 nm
2004.0 nm
2330 & 2334 nm
3240 & 3270 nm
3345 nm HP
3345 & 3375 nm
4524 & 4534 nm
4565 nm HP
5184 & 5263 nm

nanoplus Distributed Feedback Lasers (**DFB**) are specifically designed for high-precision gas detection using tunable diode laser absorption spectroscopy (**TDLAS**). Our devices operate **reliably** in more than 100,000 installations worldwide. For more than 25 years nanoplus has set the standard for DFB laser technology and is the only manufacturer routinely providing DFB lasers at **any wavelength**.

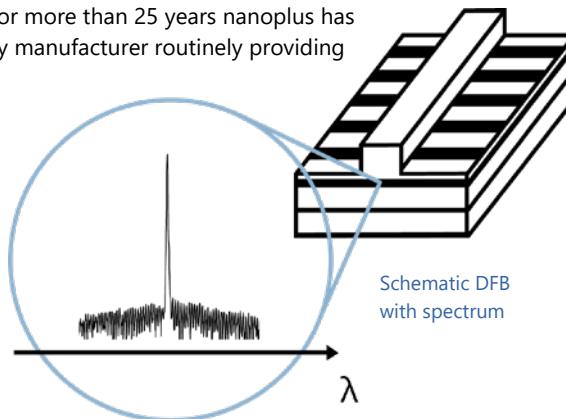

### Key features:

- MONOMODE
- CONTINUOUS WAVE
- ROOM TEMPERATURE
- MODE HOP FREE TUNING

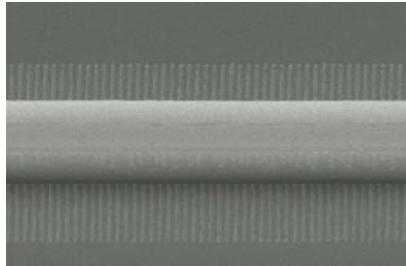

Overgrowth-free DFB device processing

Any **custom wavelength** is possible: You tell us what you need and we deliver it. With our patented DFB technology we design any wavelength **between 760 nm and 14  $\mu$ m**.

Our excellent **spectral purity** is characterized by a large side mode suppression ratio (**SMSR**) of **> 35 dB**, giving your system a low signal to noise ratio against crossinterference.

A **narrow linewidth below 3 MHz** guarantees ultra-precise scanning of the absorption line feature. The **high output power** of **several mW** yields a stronger signal and increases your measurement precision.

**Fast and wide wavelength tuning** is required for in situ systems. Most customers use a scan rate of 10 kHz and benefit from our very **large tuning coefficient**.

**"Do not change your ideas, let us deliver a laser that fits your application."**

We offer **various packaging options**, e.g. several free space housings including TEC and NTC, fiber coupling, **collimation** and **custom designs**. What do you require?



If you require **custom specifications**, please contact us. Nearly 80 % of our devices are more or less customer-specific. As nanoplus is a **fully vertically integrated company**, we control the entire process chain from design to packaging. Both nanoplus production facilities are based in **Germany**. To guarantee consistent product quality we apply a strict and **ISO certified quality management system** at all levels.

Our sales and R&D teams have long-standing experience in developing lasers. They will advise you in your design and realization phase as well as after-sales:

**We make market leaders!**





nanoplus DFB lasers on TO66, TO5, TO5.6, c-mount and SM-BTF




# Superior Specifications: 1512.2 nm

This data sheet reports performance data of a **sample nanoplus DFB laser at 1512.2 nm with enhanced specifications**. Standard specifications are available at: <http://nanoplus-usa.com/products/dfb-laser>.

These lasers are particularly suitable for ammonium ( $\text{NH}_3$ ) detection.

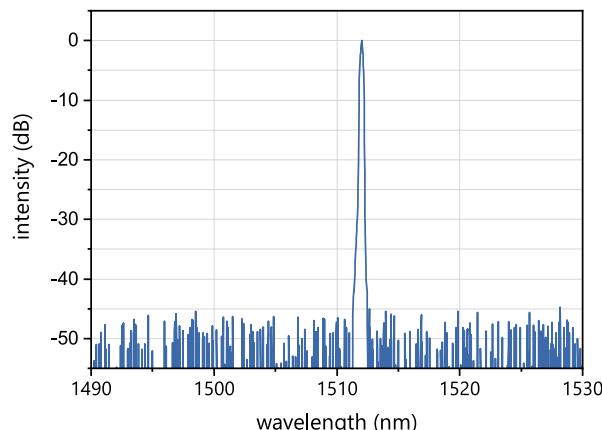

Typical room temperature cw spectrum of a nanoplus DFB laser at 1512.2 nm

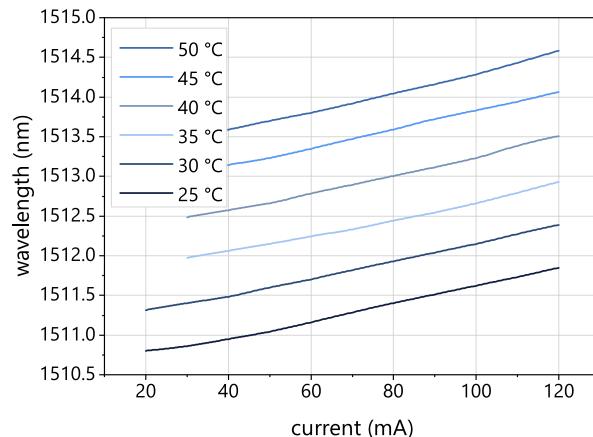

Typical mode hop free tuning of a nanoplus DFB laser at 1512.2 nm by current and temperature

electro-optical characteristics	symbol	unit	min.	typ	max.
operating wavelength (at $T_{\text{op}}$ , $I_{\text{op}}$ )	$\lambda_{\text{op}}$	nm		1512.2	
optical output power (at $\lambda_{\text{op}}$ )	$P_{\text{op}}$	mW		8	
operating current	$I_{\text{op}}$	mA		70	
operating voltage	$V_{\text{op}}$	V		2	
threshold current	$I_{\text{th}}$	mA	10	25	30
side mode suppression ratio	SMSR	dB		> 35	
current tuning coefficient	$C_{\text{I}}$	nm / mA	0.008	0.015	0.02
temperature tuning coefficient	$C_{\text{T}}$	nm / K	0.07	0.10	0.14
operating chip temperature	$T_{\text{op}}$	°C	+20	+25	+50
operating case temperature*	$T_{\text{c}}$	°C	-20	+25	+50
storage temperature*	$T_{\text{s}}$	°C	-40	+20	+80

## laser packaging options

\* non-condensing

**TO5 with TEC and NTC, black cap, AR coated window**

**TO56 without TEC or NTC, sealed, window**

**c-mount without TEC or NTC**

**butterfly package with TEC and NTC, SM or PM fiber, FC/APC connector**

**chip on carrier without TEC, with NTC**

**Technical drawings & accessories are available at: <https://www.nanoplus-usa.com/products/packaging>**

Please contact [victor.perez@nanoplus.com](mailto:victor.perez@nanoplus.com) for customized specifications, quotes and further questions.

Visit the [nanoplus website](http://nanoplus-usa.com) for technical notes, application samples or literature referrals.

nanoplus America Inc., nanoplus-usa.com, phone: +1-720-453-2454, email: [victor.perez@nanoplus.com](mailto:victor.perez@nanoplus.com)

©copyright nanoplus America Inc. 2025, all rights reserved. Technical data is subject to change without notice.